


QBAT INDUSTRIAL ICR14500-PCM 1000mAh




Li-ion Cylindrical Battery

Size: AA

Typical Characteristics

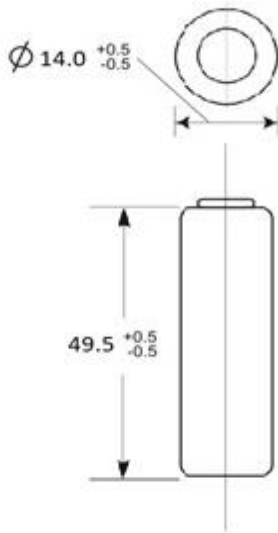

QBAT INDUSTRIAL ICR14500-PCM 1000mAh			
Specifications			
Nominal Voltage (V)		3.6V	
Capacity	Discharge rate	C/5	1C
	Nominal (mAh)	950	770
	Typical (mAh)	1000	820
Dimension	Diameter (mm)	$14.0^{+0.5}_{-0.5}$	
	Height (mm)	$49.5^{+0.5}_{-0.5}$	
Charging	Standard	100mA x 15 hrs	
	Quick	1000mA x 1.2 hrs $T_{max}=45^{\circ}C$ $-\Delta V = 5-8mV$	
Operating Temperature ($^{\circ}C$)	Standard Charging	0 ~ 45 $^{\circ}C$	
	Quick Charging	10 ~ 40 $^{\circ}C$	
	Discharging	-20 ~ 60 $^{\circ}C$	
	Storage	-20 ~ 35 $^{\circ}C$	
Internal Resistance		$\leq 52m\Omega$ (upon 50% discharge)	
Weight		Approx. 21g	
Cuff-off Voltage (V)		2.8	

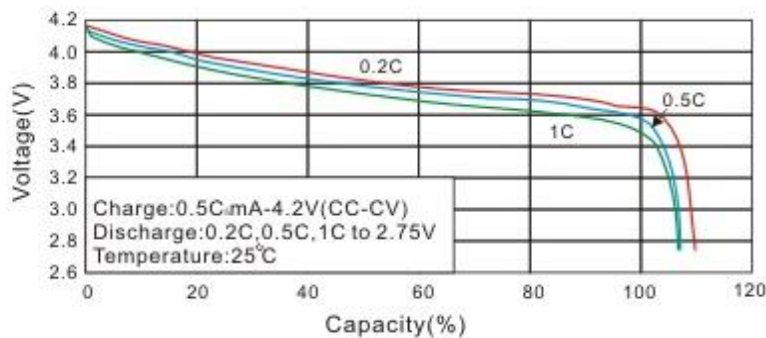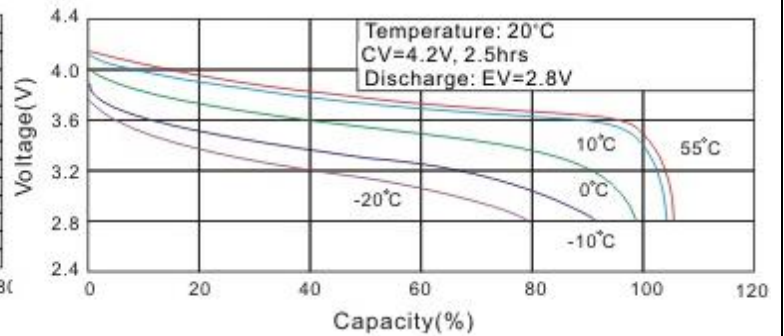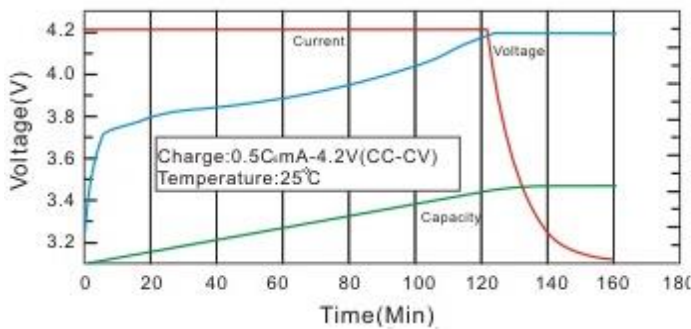

The data shown is correct at a temperature of 20 \pm 5 $^{\circ}C$ Shutdown at $-\Delta V = 15mV$, after reaching 120% of the rated capacity or at a temperature above 55 $^{\circ}C$