


QBAT INDUSTRIAL H-AA2000





NiMH Cylindrical Battery

Size: AA

Typical Characteristics

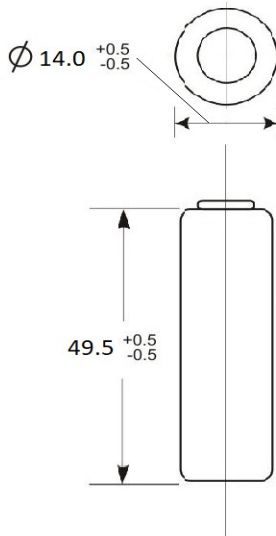

QBAT INDUSTRIAL H-AA2000			
Specifications			
Nominal Voltage (V)		1.2V	
Capacity	Discharge rate	C/5	1C
	Nominal (mAh)	1950	1780
	Typical (mAh)	2000	1820
Dimension	Diameter (mm)	$14.0^{+0.5}_{-0.5}$	
	Height (mm)	$49.5^{+0.5}_{-0.5}$	
Charging	Standard	200mA x 15 hrs	
	Quick	2000mA x 1.2 hrs $T_{max}=45^{\circ}\text{C}$ $-\Delta V = 5\sim 8\text{mV}$	
Operating Temperature ($^{\circ}\text{C}$)	Standard Charging	0 ~ 45 $^{\circ}\text{C}$	
	Quick Charging	10 ~ 40 $^{\circ}\text{C}$	
	Discharging	-20 ~ 60 $^{\circ}\text{C}$	
	Storage	-20 ~ 35 $^{\circ}\text{C}$	
Internal Resistance	$\leq 25\text{m Ohm}$ (upon 50% discharge)		
Weight	Approx.30g		
Cuff-off Voltage (V)	1.00		

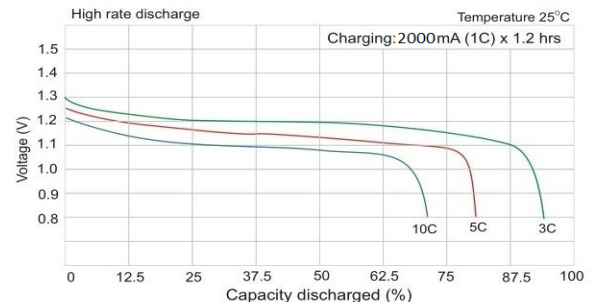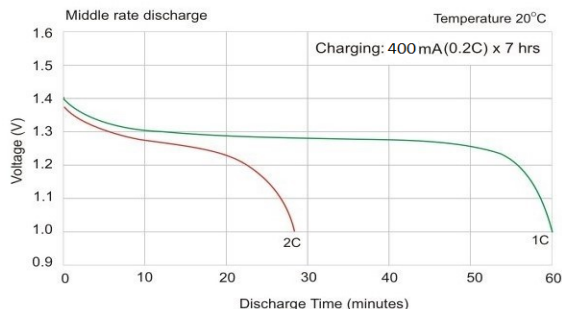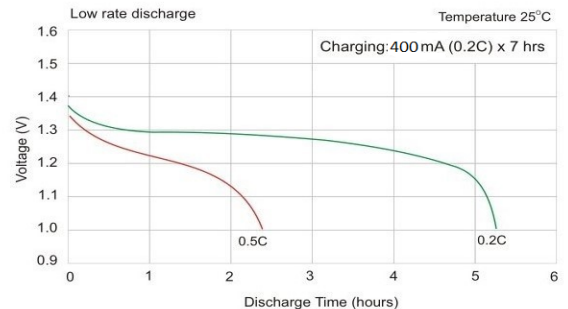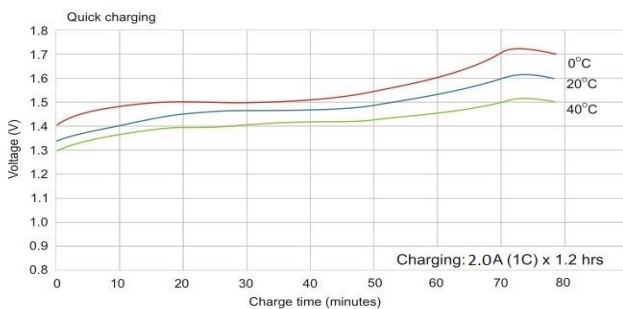

The data shown is correct at a temperature of 20 \pm 5 $^{\circ}\text{C}$ Shutdown at $-\Delta V = 15\text{mV}$, after reaching 120% of the rated capacity or at a temperature above 55 $^{\circ}\text{C}$